


TECHNICAL SPECIFICATIONS

UNIT		51QPD009NS	51QPD012NS	51KPD010NS
Cooling capacity	kW	2,6	3,3	2,9
Heating capacity	kW	2,5	3,0	n.a.
Temp range	°C	17~35	17~35	17~35
EER / COP		2.7 / 3.0	2.6 / 2.8	3.1/ n.a.
Energy label		A / A+	A / A+	A+ / n.a.
Power supply	V-ph-Hz	220-240V, 1ph, 50Hz	220-240V, 1ph, 50Hz	220-240V, 1ph, 50Hz
Standard current (cooling)	A	4,4	5,9	6,0
Standard input (cooling)	W	1010	1350	1150
Standard current (heating)	A	3,6	5,00	n.a.
Standard input (heating)	W	800	1130	n.a.
Refrigerant		R410A	R410A	R290
Refrigerant amount	kg	0,45	0,42	0,21

UNIT		51QPD009NS	51QPD012NS	51KPD010NS
Sound power level	dB(A)	63	64	64
Sound pressure level (high/med/low/silence)	dB(A)	52/50/48	52/50/48	52/50/48
Airflow (high/med/low/silence)	m ³ /h	380	380	400
Weight	kg	30.5	34	31.5
Dimensions (WxDxH)	mm	466x397x765	466x397x765	466x397x765

CONDENSATE REMOVAL

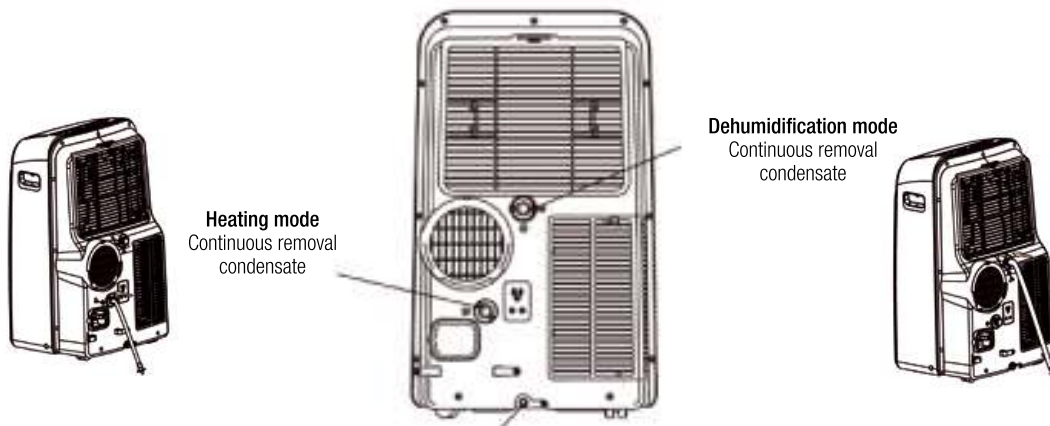

MANUAL REMOVAL OF CONDENSATE

Hose and tip provided in kit. Automatic operation



www.beijerref-carrier.com